




NMT SMART II 25/60-180

979528384

NMT SMART II / Electronically regulated circulating pump

GENERAL

Kód	979528384		
Product name	NMT SMART II 25/60-180		
Seal type	EEI		0.18
Hmotnost	2.75 kg		
H max	6.3 m	H min	0.0 m
Q max	10.3 m³/h	Q min	0.0 m³/h
	%		
Hluk [dB(A)]	≤43 dB(A)		

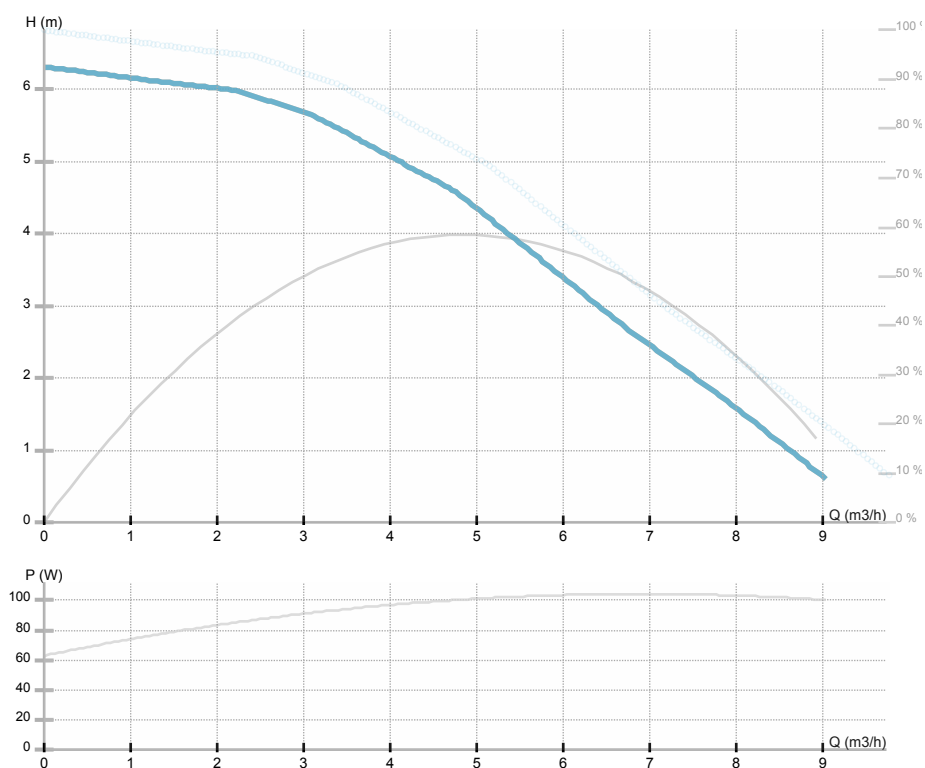

ELECTRICAL DATA

Zdroj napájení	1~230 V
Frekvence	50/60 Hz
Příkon	100 W
Ot./min	5200 rpm
Třída izolace	F (155 °C)
El. proud	0.8 A
Krytí	IP44
Thermal protection	NTC
Frame size	
Motor i e class	

INSTALLATION

Médium	
Teplota média	-10.0 ÷ 110.0 °C
Teplota okolí	40 °C
Stavební délka	180 mm
DN1	25
Přípojka	G 1 ½
Připojení	G 1 ½
Max. tlak	1.0 MPa

MATERIAL

Materiál ložiska	Uhlík
Materiál oběžného kola	PES GF 30
Materiál hydrauliky	Šedá litina
Materiál hřídele	AISI 420

NMT SMART II 25/60-180

979528384

NMT SMART II / Electronically regulated circulating pump







NMT SMART II 25/60-180

979528384

NMT SMART II / Electronically regulated circulating pump

Rozměry

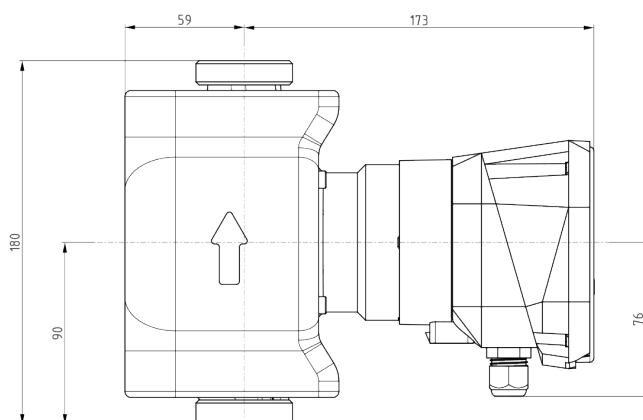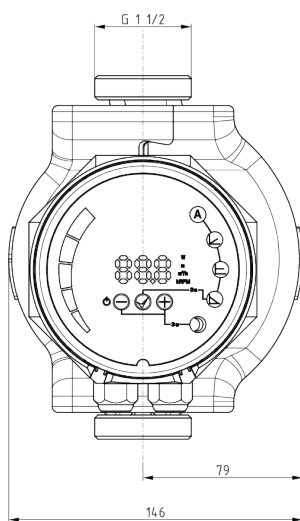




NMT SMART II 25/60-180

979528384

NMT SMART II / Electronically regulated circulating pump

Schéma zapojení

NMT Smart II

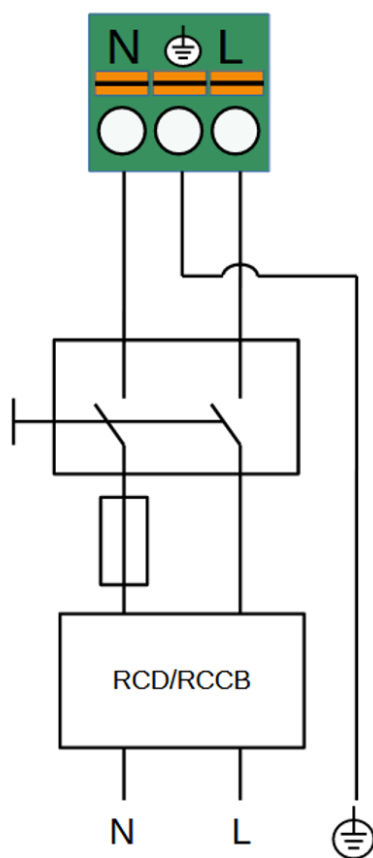



NMT SMART II 25/60-180

979528384

NMT SMART II / Electronically regulated circulating pump